

Maneuverable and Functional Spreading  
**SW 5 RC Binding Agent Spreader**



# Highlights of the SW 5 RC at a Glance

02  
03

## 1 | MAXIMUM SPREADING ACCURACY

- > Spreading unit in rotary feeder design
- > Self-cleaning metering feeders
- > Fully automatic metering independent of the travel speed
- > Three separately controllable partial spreading widths

## 2 | CONVENIENT, HIGH-PRECISION COMPUTER CONTROL

- > Easy-to-operate control panel
- > Convenient, continuous spread rate control
- > Intelligent speed detection to control the spread rate independently of the travel speed (optional feature)
- > Built-in fill level indicator (shows whether the container is "full" or "empty")

## 3 | FLEXIBLE FILLING OPTIONS

- > Can be filled from big bags via a hydraulically folding container lid
- > Cost-effective filling from a stationary silo
- > Generously sized filling connectors for pneumatic filling



The compact, tractor-towed binding agent spreader is perfect for use in confined spaces.

Rear mounting enables ideal use of the tractor's power.

The standardized three-point hitch is suitable for mounting the spreader to the rear of all common tractors and ensures that the operator has an unobstructed view toward the front.

The C series' self-cleaning metering feeders offer outstanding spreading accuracy.

Operator comfort and performance of the SW 5 RC are further enhanced by the automatic spread rate control system and the fill level indicator.



4 |

### RELIABLE DRIVE SYSTEM

- > Power supply via the tractor's hydraulic system
- > Simple connection via a double-acting hydraulic valve and an unpressurized return line

2 |

3 |

4 |

5 |

1 |

5 |

### EASY HOOK-UP

- > Internationally standardized three-point hitch
- > Fast and straightforward attachment to the rear of the tractor

# Technical Specifications

## SW 5 RC

04  
05


Container	
Container volume	5 m <sup>3</sup>
Size of filling connector / filling line	3"/3"
Spreading Unit (Metering Feeder)	
Working width / partial spreading widths	2,460 mm / 3 x 820 mm
Spread rate at 1 km/h* <sup>1</sup>	1 to 50 l/m <sup>2</sup>
Weights	
Net weight* <sup>2</sup>	1,380 kg
Dimensions (L x W x H)	1,600 x 2,550 x 2,403 mm
Tractor Requirements	
Hitch	Three-point category 2 DIN/ISO 730-1
Required hydraulic power	50 l/min at 180 bar
Max. permissible hydraulic flow rate	75 l/min
Electrical system	12 V
Recommended tractor power	min. 300 hp

\*<sup>1</sup> = The spread rate depends on various parameters (such as type of binding agent, type of spreading unit, and site conditions)

\*<sup>2</sup> = Base machine without additional equipment

# Dimensions

## SW 5 RC

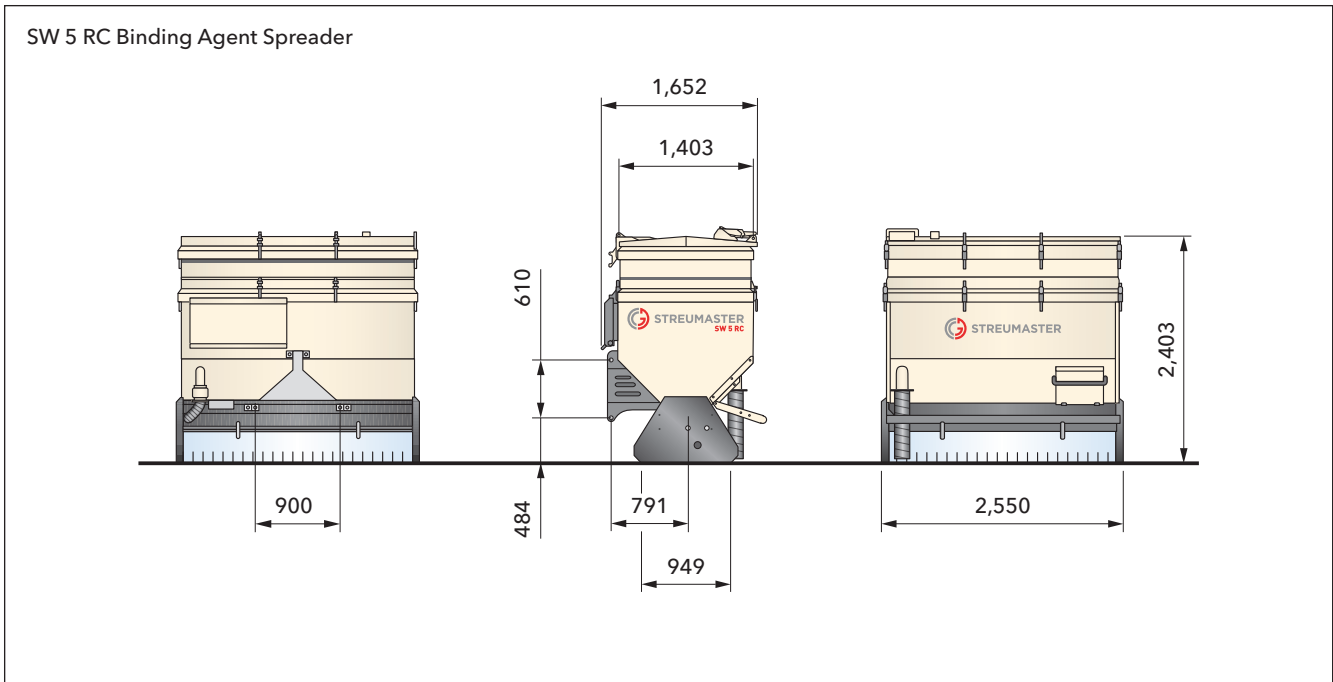

Dimensions in mm

# Technical Features

## SW 5 RC

06  
07

Container/Chassis	
Loading and lashing lugs	■
Hydraulically folding container lid	■
Relief cover	■
Vent pipe and pressure relief flap built into the container	■
3" pneumatic filling device	■
Drive System/Control System/On-Board Computer	
Hydraulic and electrical systems centrally located behind a protective cover	■
Electronic weighing device	□
Radar unit for speed detection	□
Control unit	■
Control panel for automatic spread rate control	□
Continuous spread rate adjustment	■
Fill level indicator: "container full"	■

■ = Standard equipment  
□ = Optional equipment

Spreading Unit	
DN 230-10 spreading unit in rotary feeder design	<input checked="" type="checkbox"/>
DN 230-20 low-volume spreading unit in rotary feeder design	<input type="checkbox"/>
Self-cleaning metering feeders	<input checked="" type="checkbox"/>
Three separately controllable partial spreading widths	<input checked="" type="checkbox"/>
Fully automatic metering independent of the travel speed	<input type="checkbox"/>
Miscellaneous	
Dust protection	<input checked="" type="checkbox"/>
Hose filter package	<input type="checkbox"/>

= Standard equipment  
 = Optional equipment



WIRTGEN GmbH

Reinhard-Wirtgen-Str. 2 · 53578 Windhagen · Germany

Phone: +49-26-45-131-0 · Fax: +49-26-45-131-392

Internet: [www.wirtgen.de](http://www.wirtgen.de) · E-mail: [info@wirtgen.de](mailto:info@wirtgen.de)

Made by STREUMASTER Maschinenbau GmbH

